

RedKite

IMPORTANT

Keep these instructions for future reference. Your child's safety may be affected if you do not follow these instructions.

Instruction Leaflet

Push Me Metro



*Product available in several colour options

This vehicle is intended for children from birth up to a maximum weight of 15kgs.

Complies with BS EN 1888 : 2012

Customer Care Line: 01454 326 568

Parts List

1. Frame
2. Front wheel unit.
3. Rear wheels x 2
4. Bumper bar
5. Hood
6. Axle/brake unit
7. Wheel fitting pack
8. Rain cover (not shown)



NOTE A raincover is supplied with this stroller. The raincover should be placed over the hood to use and secured with the velcro tabs. It should be folded and placed in the basket when not in use.

Assembly and usage instructions

To open the stroller

1. Release the storage latch on the side of the stroller and lift the handle in an upwards motion until it locks in place. Fig 1.

To attach the bumper bar

2. Push the bumper bar on to the brackets of the frame ensuring the arrow is pointing up, until it clicks in place. Fig 2.

To attach the rear wheels

3. Push a washer on to the end of the axle followed the wheel and another washer. Push the straight edge of the split pin through the hole in the end of the axle and cover with the hub-cap. Fig 3.

Rear axle/brake assembly

4. Slot the rear legs in to the axle assemble and push down hard until it clicks in place. Make sure the push pin has popped through the hole. Fig 4.

Front wheel assembly and swivel lock

5. With the swivel lock on the top of the wheel unit, push it on to the front leg until it clicks in place. To lock the wheel in a fixed mode, ensure the wheel is facing forward and lift the swivel lock upwards. Push it down to revert back to a swivel wheel. Fig 5 + 5a..

To use the brakes

6. Press down on the brake pedal to engage the brakes and lift it back up to release them. Fig 6.

To attach and use the hood

7. Attach the hood to frame of the stroller using the clips and Velcro. Ensure the hinge has been lifted up before attempting to retract the hood. There is a viewing window under the cover on the top of the hood. Pull it back roll it up and secure it in place with the toggle and loop. Fig 7.

To adjust the back rest

8. Squeeze the clip on the back of the seat unit and pull down to select a lower position. To raise the seat, hold the bottom of the strap, squeeze the clip and push forward. Fig 8.

To adjust the calf rest













9. Press the buttons on both sides and raise or lower to desired position. Fig 9.

To fold the stroller

10. Engage the brakes and retract the hood. Slide lock 1 to the side and then press lock 2. Keep the locks held in and lower the handle towards the floor. Attach the storage latch. Fig 10.

To adjust and secure the harness

Push the buckle prongs in to the buckle housing until they snap into position. Adjust sliders to ensure a snug fit for your child. After making adjustments to the seat always re adjust the harness. Release the harness by pressing the button on the buckle housing unit. Fig 11

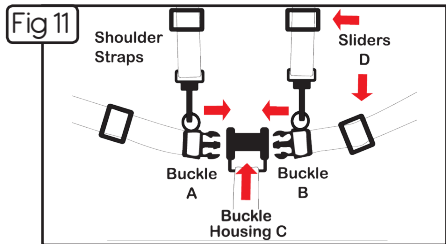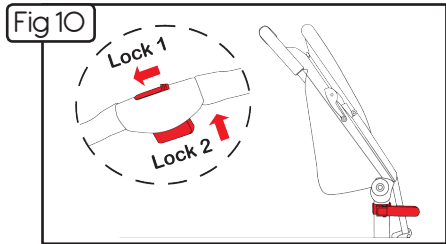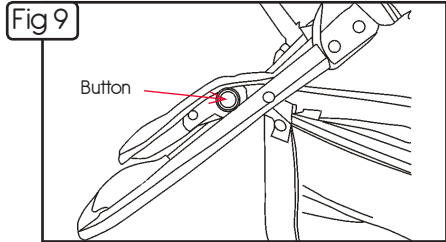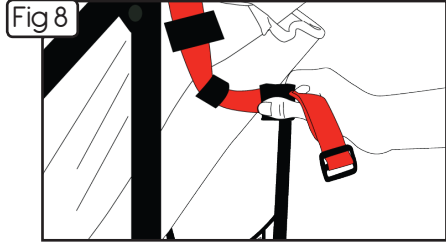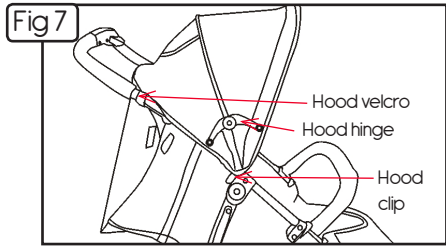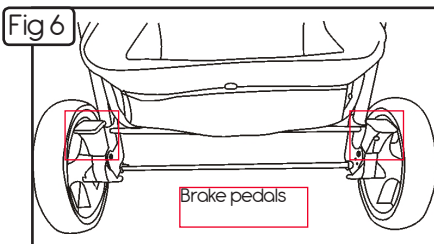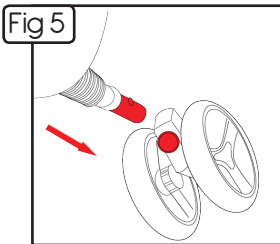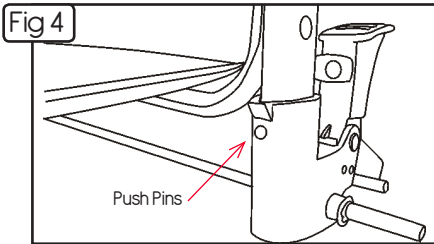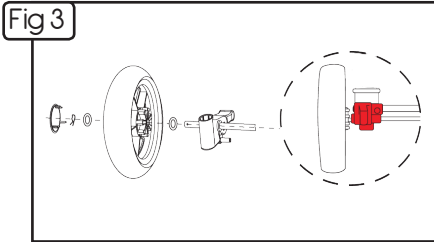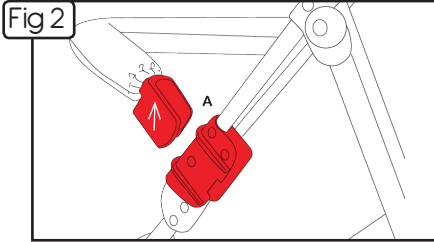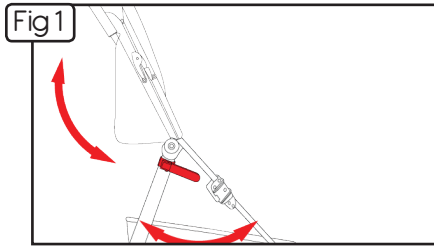

WARNING Apply all the brakes whenever you park the stroller.
WARNING Always use the crotch strap in combination with the waist belt.
WARNING! For babies aged 0 - 6 months the harness must be fed through the lowest holes to prevent risk of strangulation.

General care:

- The correct use and maintenance of this stroller is essential.
- Do not use excessive force when folding the stroller.
- If you are having problems, fully open the stroller and repeat the folding procedure.
- Always let wheels down as gently as possible when mounting and dismounting kerbs.
- Always fold the stroller when going up or down stairs.
- Never bump the stroller over these or similar obstacles.
- In some climates mould and mildew can affect the fabric and rain cover. To avoid this, do not fold the stroller when it is wet. Leave it open in a ventilated area until completely dry.
- Always store the stroller in a dry place.
- When storing the stroller in the car, never place other items on top of it.
- Do not exceed the maximum load of 2 kgs in the shopping basket. (Where provided).
- If using a ride on board, do not exceed the weight limit of 20kg. Only use ride on boards approved by Red Kite on compatible products. See www.redkitebaby.com for further information.

Cleaning:

- Fabric covers and trims may be spot washed using mild detergent and warm water. Leave to dry in a ventilated area away from direct sunlight.
- Avoid leaving your buggy in direct sunlight for prolonged periods of time as this may cause fabrics to fade.
- Do not dry clean, machine wash or tumble dry.
- Metal parts may be cleaned with a damp cloth.
- Always wipe dry. Clean plastic parts with a mild soap and water solution, wipe dry.

Maintenance:

- Maintain your stroller by lubricating all metal moving parts with a silicone based lubricant. Do not use heavy machine oil or grease as this can attract dirt or grit.
- Check that nothing is loose or broken and that no sharp edges have been exposed. Inspect all joints and the harness, replace any damaged parts immediately.
- Inspect any nuts and bolts regularly to ensure none have worked loose. Tighten as necessary.
- Only use replacement parts and accessories that have been approved by the manufacturer. Failure to do this may invalidate your warranty.

Safety warnings:

- WARNING** Never leave your child unattended.
- WARNING** To avoid injury ensure your child is kept away when unfolding and folding this product.
- WARNING** Do not let your child play with this product.
- WARNING** Always use the restraint system.
- WARNING** This product is not suitable for running or skating.
- WARNING** Your child's safety is your responsibility.
- WARNING** Any load attached to the handle affects the stability of the pram / pushchair.
- WARNING** Ensure that all the locking devices are engaged before use.
- Not intended for children weighing more than 15kgs. This stroller is designed for one child only.
 - The brake must always be engaged when placing and removing children from the stroller.
 - Any load attached to the handle and/or on the backrest and/or on the sides of the vehicle will affect the stability of the stroller.
 - Lift a child in and out of the stroller. Do not allow a child to stand on the footrest or seat.
 - Do not use accessories that have not been approved by the manufacturer.
 - Never use the buggy to carry a child up and down stairs or escalators. Remove your child and fold the pushchair when going up or down stairs / escalators.
 - For newborns, it is advisable to use the seat units in the fully reclined position.

NOTE D rings have been provided for the attachment of a separate safety harness approved to BS 6684 (if required). The points for attachment are located on the waist straps of the harness.

This product complies with BS EN 1888 : 2012

For all technical queries please call: 01454 326 568

Imported by:

The Red Kite Baby Co Ltd
35 Lavenham Road
Beeches Industrial Estate
Yate
Bristol
BS37 5QX

RedKite