


red kite

IMPORTANT

Keep these instructions for future reference. Your child's safety may be affected if you do not follow these instructions.

Instruction Leaflet


Push Me Koko

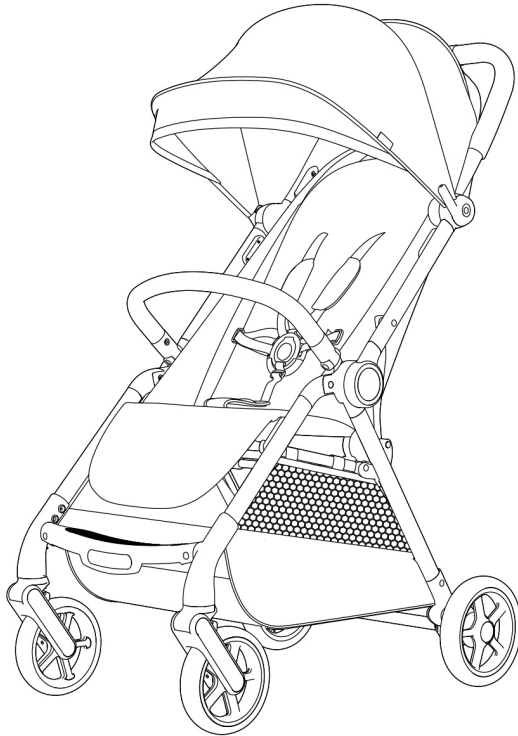


This vehicle is intended for children from birth and up to 22 Kg or 4 years whichever comes first.

EN 1888-2: 2018
Customer Care Line: 01454 326 568



Parts List

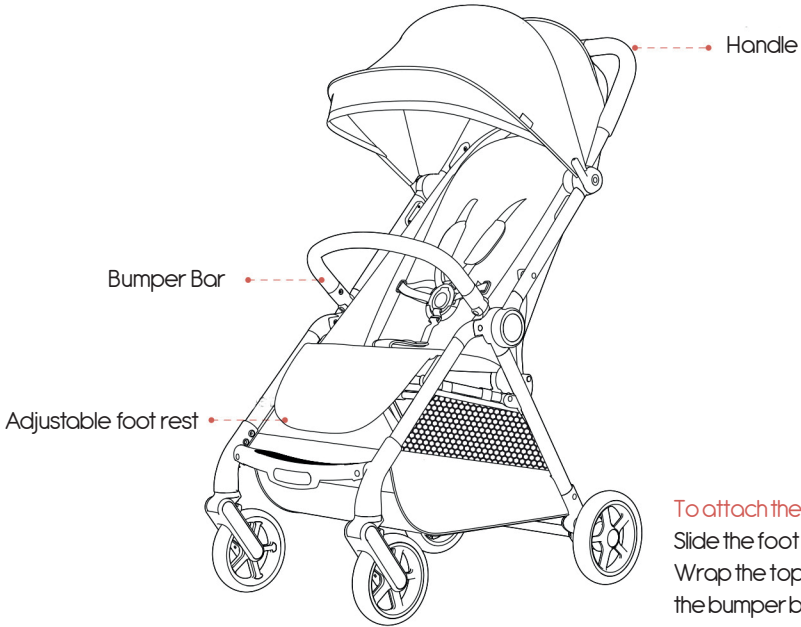

To attach the apron:
Slide the foot rest into the apron.
Wrap the top of the apron around
the bumper bar and secure with
press studs and elastic toggles.

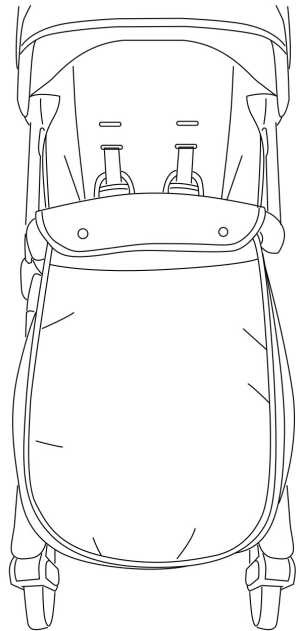


Parts List

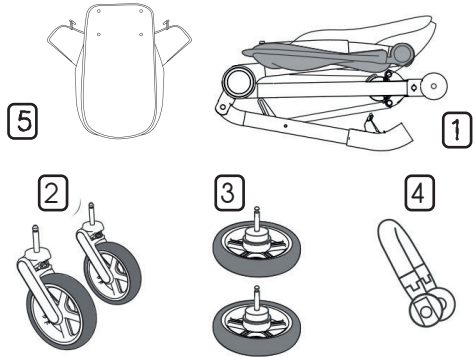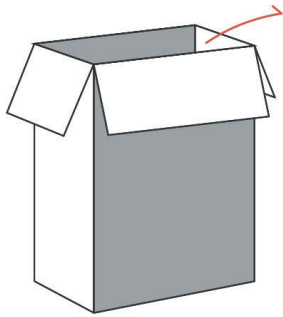

1. Frame 2. Front wheels x2 3. Rear wheels x2 4. Bumper bar 5. Apron 6. Rain cover (not shown)

To assemble and use the stroller

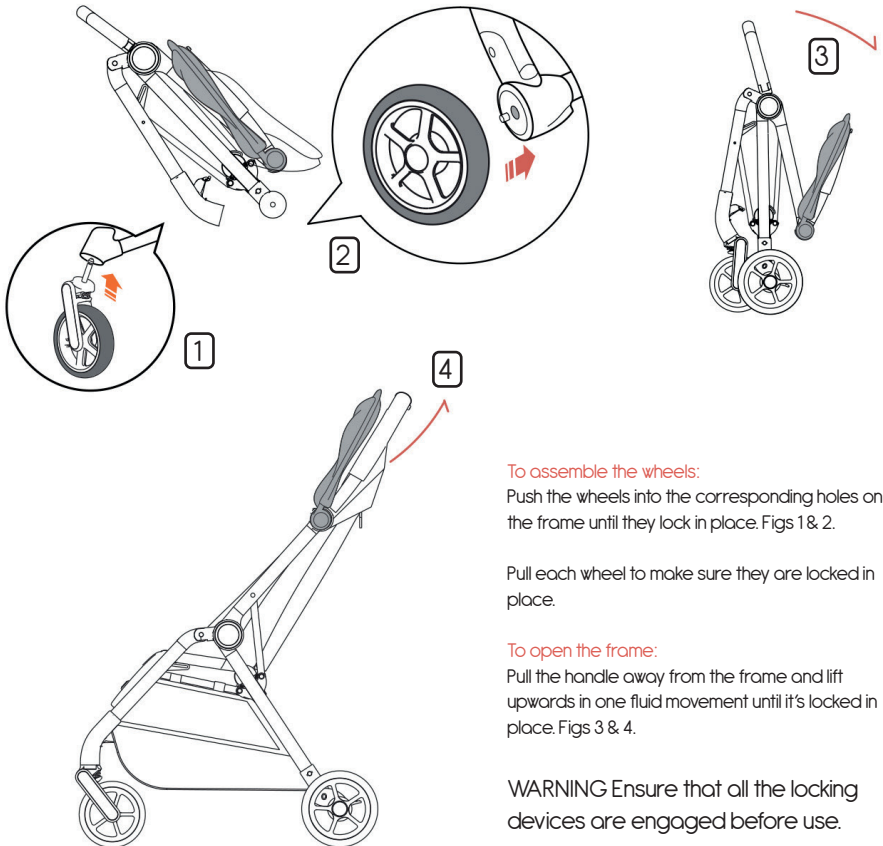

To assemble the wheels:

Push the wheels into the corresponding holes on the frame until they lock in place. Figs 1 & 2.

Pull each wheel to make sure they are locked in place.

To open the frame:

Pull the handle away from the frame and lift upwards in one fluid movement until it's locked in place. Figs 3 & 4.


WARNING Ensure that all the locking devices are engaged before use.

To attach and remove the bumper bar

5




To attach and remove the bumper bar: Slide the bumper bar on to the attachment points on both sides of the frame until they lock in place. Figs 5. To remove the bumper bar, press the buttons on each side and lift upwards.

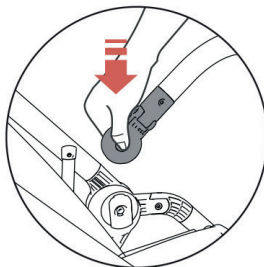

Seat recline, harness strap height and foot rest

6

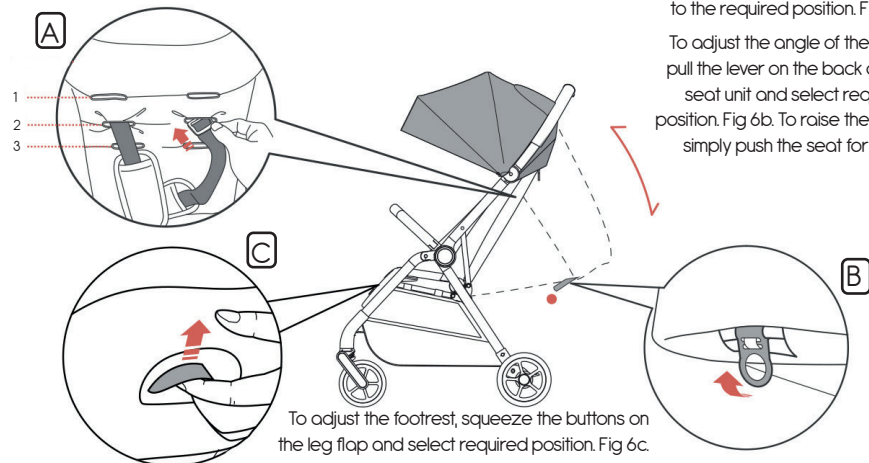


To adjust the height of the shoulder straps, thread the buckle on the back of the seat through the slots and move to the required position. Fig 6a.

To adjust the angle of the seat, pull the lever on the back of the seat unit and select required position. Fig 6b. To raise the seat, simply push the seat forward.

To adjust the footrest, squeeze the buttons on the leg flap and select required position. Fig 6c.

To secure and adjust the harness

7

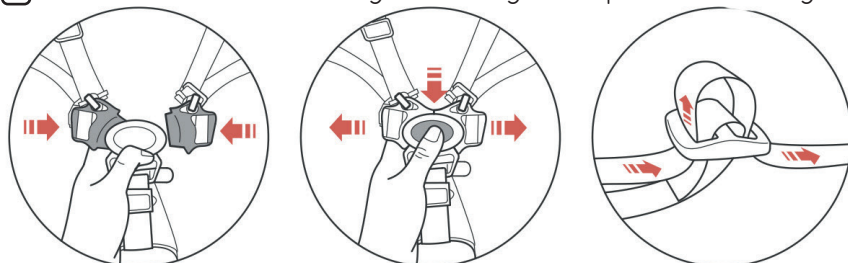

WARNING! For babies aged 0 - 6 months the harness must be fed through the retaining holes to prevent risk of strangulation.

Connect each side of the combines waist and shoulder straps into the central buckle until they click in place. Press the button in the centre of the buckle to release the combined waist and should strap.

Adjust the waist and harness straps to achieve a snug fit. Figs 8.

WARNING! Always use the crotch strap in combination with the waist belt.

To use the brakes

8

With your foot press downwards on the back of the pedal to engage the brakes and press down on the front of the pedal to release the brakes. Figs 8.






WARNING Apply all the brakes whenever you park the stroller.

To fold the stroller

9

Press in the small button (1) and whilst keeping it depressed, squeeze the trigger (2) and push the handle forwards to start the folding process. Push the handle forwards with a little force and the stroller will automatically fold and lock in place. Figs 9.

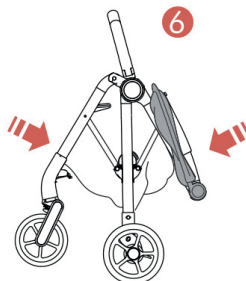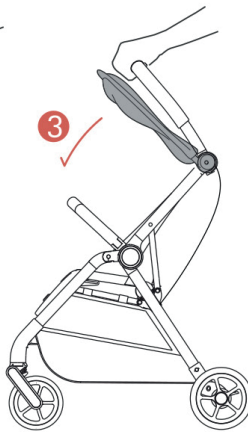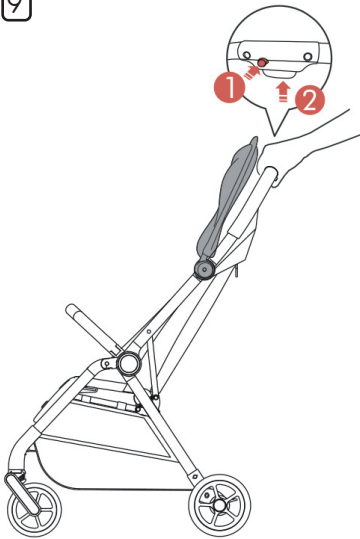

General care:

- The correct use and maintenance of this stroller is essential.
- Do not use excessive force when folding the stroller.
- If you are having problems, fully open the stroller and repeat the folding procedure.
- Always let wheels down as gently as possible when mounting and dismounting kerbs.
- Always fold the stroller when going up or down stairs.
- Never bump the stroller over these or similar obstacles.
- In some climates mould and mildew can affect the fabric and rain cover. To avoid this, do not fold the stroller when it is wet. Leave it open in a ventilated area until completely dry.
- Always store the stroller in a dry place.
- When storing the stroller in the car, never place other items on top of it.
- Do not exceed the maximum load of 2 kgs in the shopping basket. (Where provided).

Cleaning:

- Fabric covers and trims may be spot washed using mild detergent and warm water. Leave to dry in a ventilated area away from direct sunlight.
- Avoid leaving your stroller in direct sunlight for prolonged periods of time as this may cause fabrics to fade.
- Do not dry clean, machine wash or tumble dry.
- Metal parts may be cleaned with a damp cloth.
- Always wipe dry. Clean plastic parts with a mild soap and water solution, wipe dry.

Maintenance:

- Maintain your stroller by lubricating all metal moving parts with a silicone based spray. Do not use heavy machine oil or grease as this can attract dirt or grit.
- Check that nothing is loose or broken and that no sharp edges have been exposed. Inspect all joints and the harness, replace any damaged parts immediately.
- Inspect any nuts and bolts regularly to ensure none have worked loose. Tighten as necessary.
- Only use replacement parts and accessories that have been approved by the manufacturer. Failure to do this may invalidate your warranty.

Safety warnings:

- WARNING Never leave your child unattended.
- WARNING To avoid injury ensure your child is kept away when unfolding and folding this product.
- WARNING Do not let your child play with this product.
- WARNING Always use the restraint system.
WARNING This product is not suitable for running or skating.
- WARNING Your child's safety is your responsibility.
- WARNING Any load attached to the handle affects the stability of the pram / pushchair.
- WARNING! For babies aged 0 – 6 months the harness must be fed through the retaining holes to prevent risk of strangulation.
- For newborns, it is safest to use the seat unit in the fully reclined position.
- This stroller is designed for and to be used by one child only.
- Always engage the brakes when placing children in and removing from the stroller.

- Before folding the stroller check the following:

- A Your child is clear of moving parts
- B The rear brakes have been applied
- C The front wheels are secured in the locked mode
- D The seat unit or car seat has been removed
- E All items have been removed from the basket
- F Never attempt to close or fold the stroller with the child inside

EN1888-2:2018

For all technical queries please call: 01454 326 568

Manufactured by: The Red Kite Baby Co Ltd,
35 Lavenham Road, Beeches Industrial Estate,
Yate, Bristol, BS37 5QX. UK